



	SPX424CDH	 2030
	Abnehmbares Gewicht	200
	2.5T-D7	20
	JIB800GX JIB800.1MX JIB800.2H1MX MV600.3E	25 110 140 200



Inklusive hydraulisch verstellbares Kettenfahrwerk



3160 x 780 x 1875 mm



3740 x 3740 mm



2400 kg






11,9 m




15,0 m

 288 Ah / 24 V  
7,3kWh  
230V-50A

 800 kg  
73 m - Ø 7 mm  
21-42 m/min

	
2400 kg	3 -20 m
1600 kg	2 -32 m
800 kg	1 -65 m

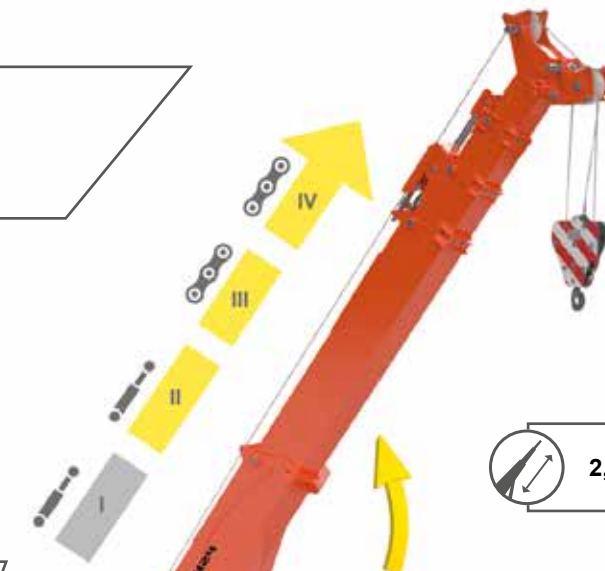

2,6 m - 8,5 m / 26 sek.



0°/75° / 14 sek.



360° / 1,5 U/min



2200 kg



3160 x 1065 x 1956 mm



20°



0,55 kg/cm<sup>2</sup>



1,8 km/h